


Series 2, Built-in Ceramic Electric Hob, 60 cm, Stainless Steel Frame

BOSCH

NKE645G17

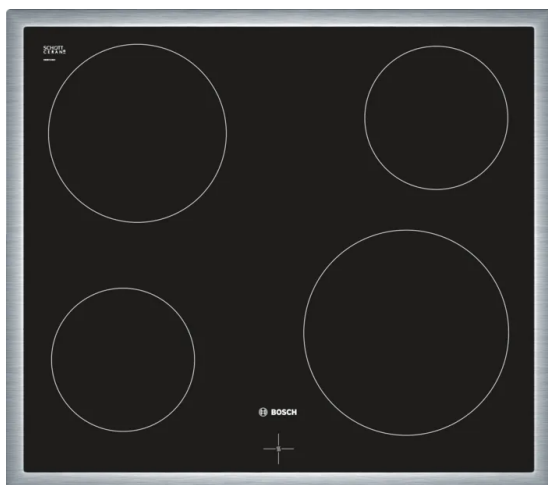

The 60 cm electric radiant hob: makes cooking and cleaning exceptionally easy with high-speed QuickTherm ceramic zones and an elegant stainless steel frame.

- **4 HighSpeed QuickTherm Cooking Zones:** radiant heating elements reach target cooking temperatures rapidly for efficient boiling and frying.
- **Cooktop Control via Cooker/Oven Knobs:** designed to pair with built-in oven units with integrated control dials.
- **Stainless Steel Frame Around Rim:** classic all-round stainless steel border ideal for integration into existing cutout openings.
- **Residual Heat Indicators (4-Stage):** clear visual warning lights indicate when cooking zones remain hot to touch after use.
- **Smooth Glass-Ceramic Surface:** heat-resistant ceramic glass panel wipes clean effortlessly after cooking.

Optional Accessories

HEZ390042 4-piece Cookware Set for Ceramic Hobs

HEZ9SE030 3-piece Stainless Steel Pan Set



Product Name / Family:	Built-in Ceramic Electric Hob
Construction Type:	Built-in
Surface / Frame Color:	Black Glass / Stainless Steel Frame
Hob Dimensions (WxD):	583 x 513 mm
Appliance Height:	43 mm
Required Niche Size (HxWxD):	43 x 560-560 x 490-500 mm
Net Weight:	7.2 kg
Gross Weight:	8.0 kg
Total Number of Zones:	4 Radiant QuickTherm Zones
Front Left Zone:	Ø 180 mm / 2.0 kW
Rear Left Zone:	Ø 145 mm / 1.2 kW
Rear Right Zone:	Ø 210 mm / 2.2 kW
Front Right Zone:	Ø 145 mm / 1.2 kW
Total Connected Load:	6.6 kW
Voltage:	220 - 240 V
Frequency:	50; 60 Hz
Control Type:	External Oven Control Dials
Safety Device:	4-fold Residual Heat Indicator
EAN Code:	4242002878466

Series 2, Built-in Ceramic Electric Hob, 60 cm, Stainless Steel Frame

BOSCH

NKE645G17

Design & Frame Style

- **Standard 60 cm Cutout Compatibility:** Fits standard 560 x 490 mm kitchen worktop cutouts seamlessly.
- **Stainless Steel Rim Frame:** All-around stainless steel border protects ceramic glass edges against accidental pot knocks.
- **High-Durability Ceramic Glass:** Premium heat-resistant dark ceramic surface built for daily cooking demands.

Cooking Zone Performance & QuickTherm

- **4 Radiant QuickTherm Cooking Positions:** Fast heating response time allows immediate boiling and frying temperature setup.
- **Versatile Zone Diameters:** Features varying element sizes from Ø 145 mm up to Ø 210 mm (2.2 kW) for small saucepans to large frying pans.
- **Combined Cooker Integration:** Operates in connection with a compatible built-in cooker base unit with dedicated hob control knobs.

Safety & Cleanability

- **4-Stage Residual Heat Display:** Integrated lights display residual heat for each zone after turning off elements.
- **Wipe-Clean Flat Surface:** Smooth glass top without protruding controls allows quick surface wiping with a damp cloth.

Technical Specifications & Cutout Dimensions

- **Appliance Dimensions (H x W x D):** 43 x 583 x 513 mm
- **Required Niche Cutout Dimensions (H x W x D):** 43 x 560 x 490-500 mm
- **Min. Worktop Thickness:** 20 mm
- **Electrical Connected Load:** 6.6 kW / 220-240 V / 50-60 Hz
- **Net Weight:** 7.2 kg

Dimensioned Technical Drawing (mm)

